
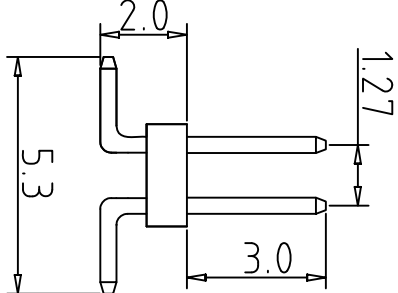
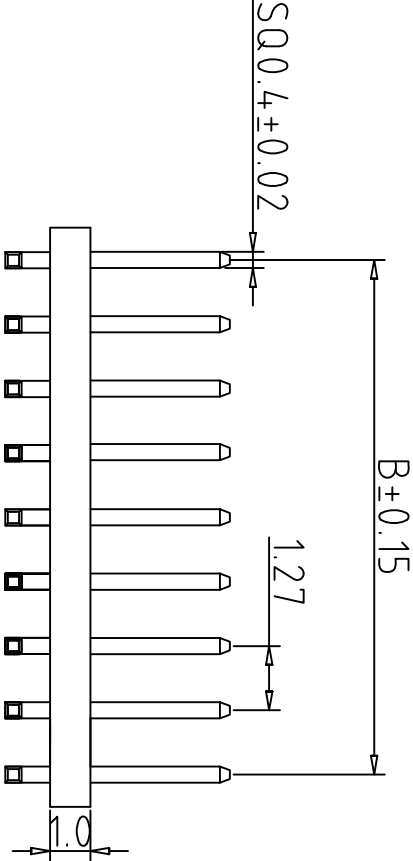



REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2013/05/24	/	NEW	Vicky

SPECIFICATIONS:

Current Rating: 1Amp
Insulator Resistance: 1000Megohms min
Dielectric withstanding: AC 500V
Operating Temperature: -40°~+85°
Contact Material: Brass
Insulator Material: PA6T UL 94V-0
Plating: Gold 0.8U"

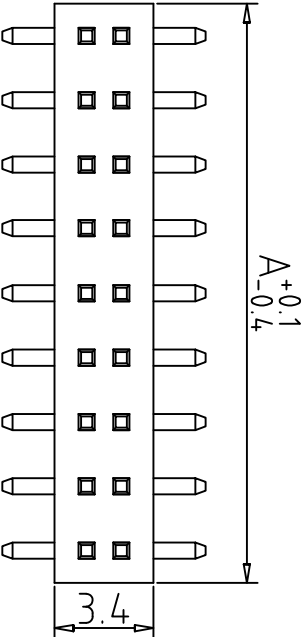

PIN NO.	A	B	PIN NO.	A	B
2x1pin			2x26pin	33.02	31.75
2x2pin	2.54	1.27	2x27pin	34.29	33.02
2x3pin	3.81	2.54	2x28pin	35.56	34.29
2x4pin	5.08	3.81	2x29pin	36.83	35.56
2x5pin	6.35	5.08	2x30pin	38.10	36.83
2x6pin	7.62	6.35	2x31pin	39.37	38.10
2x7pin	8.89	7.62	2x32pin	40.64	39.37
2x8pin	10.16	8.89	2x33pin	41.91	40.64
2x9pin	11.43	10.16	2x34pin	43.18	41.91
2x10pin	12.70	11.43	2x35pin	44.45	43.18
2x11pin	13.97	12.70	2x36pin	45.72	44.45
2x12pin	15.24	13.97	2x37pin	46.99	45.72
2x13pin	16.51	15.24	2x38pin	48.26	46.99
2x14pin	17.78	16.51	2x39pin	49.53	48.26
2x15pin	19.05	17.78	2x40pin	50.80	49.53
2x16pin	20.32	19.05	2x41pin	52.07	50.80
2x17pin	21.59	20.32	2x42pin	53.34	52.07
2x18pin	22.86	21.59	2x43pin	54.61	53.34
2x19pin	24.13	22.86	2x44pin	55.88	54.61
2x20pin	25.40	24.13	2x45pin	57.15	55.88
2x21pin	26.67	25.40	2x46pin	58.42	57.15
2x22pin	27.94	26.67	2x47pin	59.69	58.42
2x23pin	29.21	27.94	2x48pin	60.96	59.69
2x24pin	30.48	29.21	2x49pin	62.23	60.96
2x25pin	31.75	30.48	2x50pin	63.50	62.23

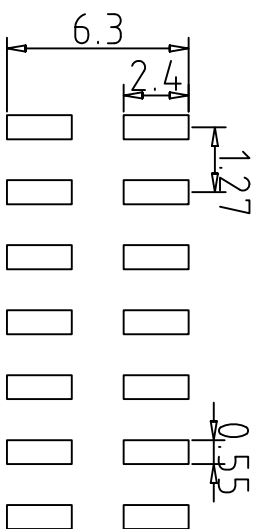

P.C.B LAYOUT

GENERAL TOLERANCE				UNITS mm		NAME:	
SELECT	✓			MAT'L		PH	
TOL ON.	1	2	3			PART NO:	
X.XXX		±0.05	±0.15	FINISH		PH127***F-03***	
X.XX	±0.15	±0.13	±0.25			APPD:	
X.X	±0.20	±0.25	±0.50			Vicky	
X.		±0.38	±1.00	QTY		CHKD:	
ANGLE	±0.5°					Emilia	
						DR:	
						Iris	
				DWG NO.		TITLE: PH1.27*1.0 2*XP SMT DA=3.0 DB=2.0 展开5.3	
				ATOM-A00737		ATOM®	
						深圳市爱特姆科技有限公司	
						SHENZHEN ATOM TECHNOLOGY CO., LTD.	
				SCALE		SHEET	
				1:1		1/1	
						REV	
						A	

DWG NO.		SCALE		SHEET		REV	
ATOM-A00737		1:1		1/1		A	

ATOM
深圳市爱特姆科技有限公司
SHENZHEN ATOM TECHNOLOGY CO., LTD.