
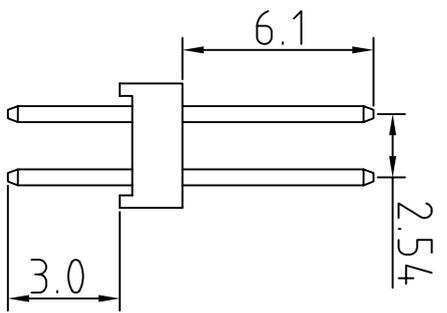
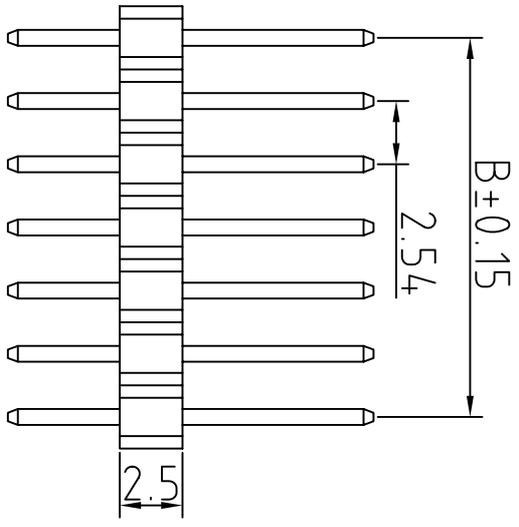


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2008/12/12	/	NEW	Vicky


SPECIFICATIONS:

Current Rating: 3Amp
 Insulator Resistance: 1000Megohms min
 Dielectric withstanding: AC 500V
 Operating Temperature: -55°~+105°
 Max Processing Temp: 180°for 5~10 seconds
 Contact Material: Brass
 Insulator Material: PBT UL 94V-0
 Plating: GOLD 0.8U"

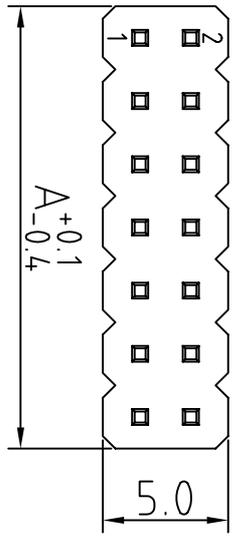

PIN NO.	A	B	PIN NO.	A	B
2×1pin	2.54		2×21pin	53.34	50.8
2×2pin	5.08	2.54	2×22pin	55.88	53.34
2×3pin	7.62	5.08	2×23pin	58.42	55.88
2×4pin	10.16	7.62	2×24pin	60.96	58.42
2×5pin	12.7	10.16	2×25pin	63.5	60.96
2×6pin	15.24	12.7	2×26pin	66.04	63.5
2×7pin	17.78	15.24	2×27pin	68.58	66.04
2×8pin	20.32	17.78	2×28pin	71.12	68.58
2×9pin	22.86	20.32	2×29pin	73.66	71.12
2×10pin	25.4	22.86	2×30pin	76.2	73.66
2×11pin	27.94	25.4	2×31pin	78.74	76.2
2×12pin	30.48	27.94	2×32pin	81.28	78.74
2×13pin	33.02	30.48	2×33pin	83.82	81.28
2×14pin	35.56	33.02	2×34pin	86.36	83.82
2×15pin	38.1	35.56	2×35pin	88.9	86.36
2×16pin	40.64	38.1	2×36pin	91.44	88.9
2×17pin	43.18	40.64	2×37pin	93.98	91.44
2×18pin	45.72	43.18	2×38pin	96.52	93.98
2×19pin	48.26	45.72	2×39pin	99.06	96.52
2×20pin	50.8	48.26	2×40pin	101.6	99.06

GENERAL TOLERANCE		UNITS	NAME:	PH
SELECT	✓	mm	PART NO:	PH254***D-09***
TOL	1 2 3	MAT'L	APPD:	MIKE
X.XXX	±0.08 ±0.15	FINISH	CHKD:	Vicky
X.XX	±0.15 ±0.13 ±0.25	QTY	DR:	Doris
X.X	±0.20 ±0.25 ±0.50			
X.	±0.38 ±1.00			
ANGLE	±0.5°			

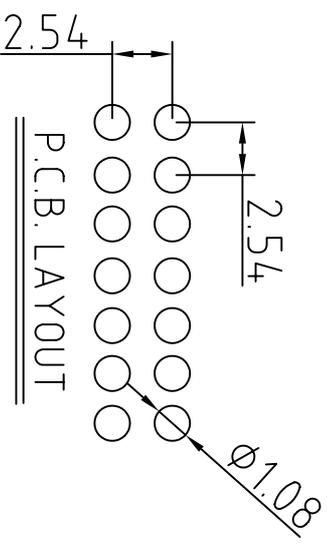

ATOM 深圳市爱特姆科技有限公司
 SHENZHEN ATOM TECHNOLOGY CO., LTD.

TITLE: PH254*2.5 2*XP DIP 180°
 L=11.6/3.0/6.1

DWG NO. ATOM-A01066

SCALE 1:1 SHEET 1/1 REV A