

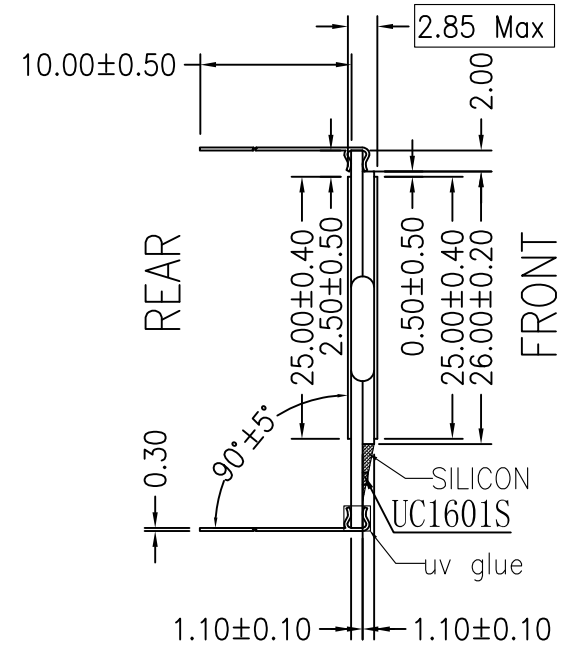
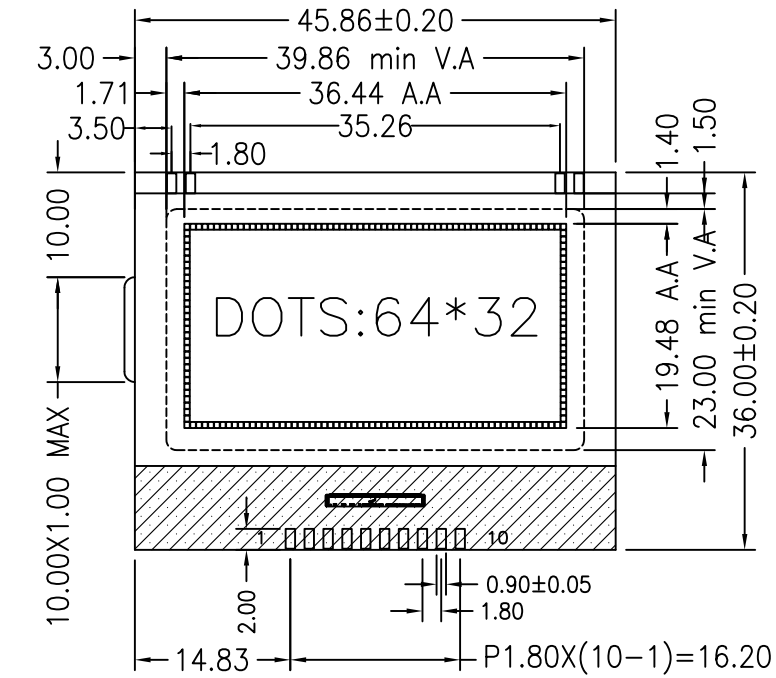


Revised Record	1.0	New issue	2017-02-27	3.0	Change the chickness	2017-03-24		
	2.0	Add the side view of PIN	2017-03-15	4.0	Add silicon and UV glue diagram	2017-03-27		




INTERFACE:	
PIN	DESC
1	VLCD
2	VB0+
3	VB0-
4	VB1-
5	VB1+
6	VSS
7	VDD
8	SDA
9	SCK
10	RST

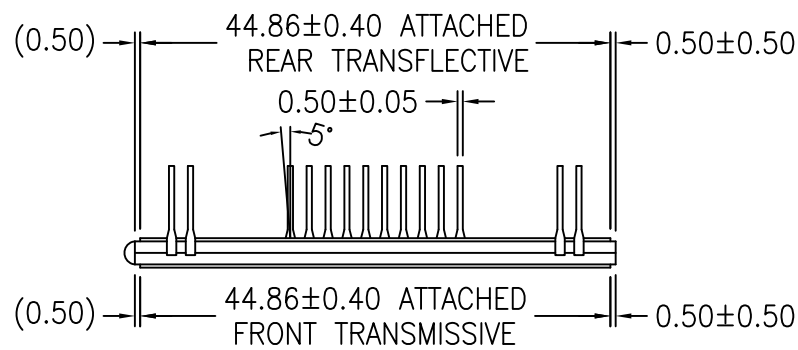

NOTES:

- | | |
|----------------------------|---|
| 01. DISPLAY TYPE: | FSTN/POSITIVE/TRANSFLECTIVE (Anti-Glare) RoHS |
| 02. OPERATING VOLTAGE: | VLCD:6.4V, VDD:3.0V |
| 03. OPERATING TEMPERATURE: | -30°C~70°C |
| 04. STORAGE TEMPERATURE: | -40°C~80°C |
| 05. DRIVE MODE: | 1/33 DUTY 1/6 BIAS |
| 06. VIEWING DIRECTION: | 10:30 |
| 07. DRIVE IC: | UC1601S |
| 08. CONNECTOR: | COG+PIN |
| 09. BACKLIGHT: | NONE |
| 10. CUSTOMER'S PART ID: | UNKNOWN |

		RDX0120-GC-2	VERSION: 4.0	
CHECKED BY: BDT-09			PAGE 1	OF 2
APPROVED BY: BDT-03			UNIT: mm	
			DATE:	2017-03-27