



曜凌光電股份有限公司

住址: 42878 台中市大雅区科雅路 25 號 5F WEB: <http://www.Raystar-Optronics.com>
5F., No.25, Keya Rd., Daya Dist., Taichung E-mail: sales@raystar-optronics.com
City 428, Taiwan Tel:886-4-2565-0761 Fax :
886-4-2565-0760

RFE430G-AIW-DNC

SPECIFICATION

CUSTOMER:

APPROVED BY	
PCB VERSION	
DATE	

FOR CUSTOMER USE ONLY

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

ISSUED DATE:

Contents

	Page
1. Revision History	3
2. General Specification	4
3. Module Coding System	5
4. Interface Pin Function	6
5. Contour Drawing & Touch panel Information	7
6. Block Diagram	9
7. Absolute Maximum Ratings	10
8. Electrical Characteristics	10
9. DC Characteristics	11
10. AC Characteristics	12
11. Optical Characteristics	14
12. Reliability	16
13. Package specification	17

1. Revision History

DATE	VERSION	REVISED PAGE NO.	Note
2013/04/11	1		First issue
2013/07/08	2	18	Modify the packing diagram

2. General Specification

This technical specification applies to 4.3' color TFT-LCD panel. The 4.3' color TFT-LCD panel is designed for camcorder, digital camera application and other electronic products which require high quality flat panel displays. This module follows RoHS.

- Dot Matrix: 480 x RGBx272
- Module dimension: 105.5 x 67.2 x 4.05 (max.) mm³
- Active Area: 95.04 x 53.86 mm²
- Dot pitch: 0.066 x 0.198 mm²
- LCD type: TFT, Negative, Transmissive
- View direction: 12 o'clock
- Gray Scale Inversion Direction: 6 o'clock
- Backlight Type: LED, Normally White

3. Module Coding System

R	F	E	430	G	-	A	I	W	-	D	N	C
1	2	3	4	5	-	6	7	8	-	9	10	11


Item	Description	
1	R : Raystar Optonics Inc.	
2	Display Type : TFT Type	
3	Solution: A: 128x160 B:320x234 C:320x240 D:480x234 E:480x272	
4	Display Size : 4.3" TFT	
5	Version Code.	
6	Model serials no.	
7	Polarizer Type, Temperature range, View direction	A : Reflective, N.T, 6:00
		K : Transflective, W.T,12:00
		D : Reflective, N.T, 12:00
		1 : Transflective, U.T,6:00
		G : Reflective, W. T, 6:00
		4 : Transflective, U.T.12:00
		J : Reflective, W. T, 12:00
		C : Transmissive, N.T,6:00
		0 : Reflective, U. T, 6:00
8	Backlight	F : Transmissive, N.T,12:00
		3 : Reflective, U. T, 12:00
		I : Transmissive, W. T, 6:00
		B : Transflective, N.T,6:00
		L : Transmissive, W.T,12:00
		E : Transflective, N.T.12:00
9	Driver Method	2 : Transmissive, U. T, 6:00
		H : Transflective, W.T,6:00
		5 : Transmissive, U.T,12:00
		N : Without backlight
		Y : LED, Yellow Green
10	Interface	P : EL, Blue green
		A : LED, Amber
		T : EL, Green
		W : LED, White
		D : EL, White
11	TS	O : LED, Orange
		F : CCFL, White
		G : LED, Green
9	Driver Method	D: Digital A: Analog
10	Interface	N : without control board A : 8Bit B : 16Bit
11	TS	N : Without TS S : resistive touch panel C : capacitive touch panel


4. Interface Pin Function

4.1. LCM PIN Definition


Pin	Symbol	I/O	Function	Remark
1	LED-	P	Power for LED backlight cathode	
1	LED+	P	Power for LED backlight anode	
3	GND	P	Power ground	
4	VDD	P	Power voltage	
5	R0	I	Red data (LSB)	
6	R1	I	Red data	
7	R2	I	Red data	
8	R3	I	Red data	
9	R4	I	Red data	
10	R5	I	Red data	
11	R6	I	Red data	
12	R7	I	Red data (MSB)	
13	G0	I	Green data (LSB)	
14	G1	I	Green data	
15	G2	I	Green data	
16	G3	I	Green data	
17	G4	I	Green data	
18	G5	I	Green data	
19	G6	I	Green data	
20	G7	I	Green data (MSB)	
21	B0	I	Blue data (LSB)	
22	B1	I	Blue data	
23	B2	I	Blue data	
24	B3	I	Blue data	
25	B4	I	Blue data	
26	B5	I	Blue data	
27	B6	I	Blue data	
28	B7	I	Blue data (MSB)	
29	GND	P	Power ground	
30	CLK	I	Pixel clock	
31	DISP	I	Display on/off	
32	NC	-	No connection	
33	NC	-	No connection	
34	DE	I	Data Enable	
35	NC	-	No connection	
36	GND	P	Power ground	
37	NC	-	No connection	
38	NC	-	No connection	
39	NC	-	No connection	
40	NC	-	No connection	

5. Contour Drawing & Touch panel Information

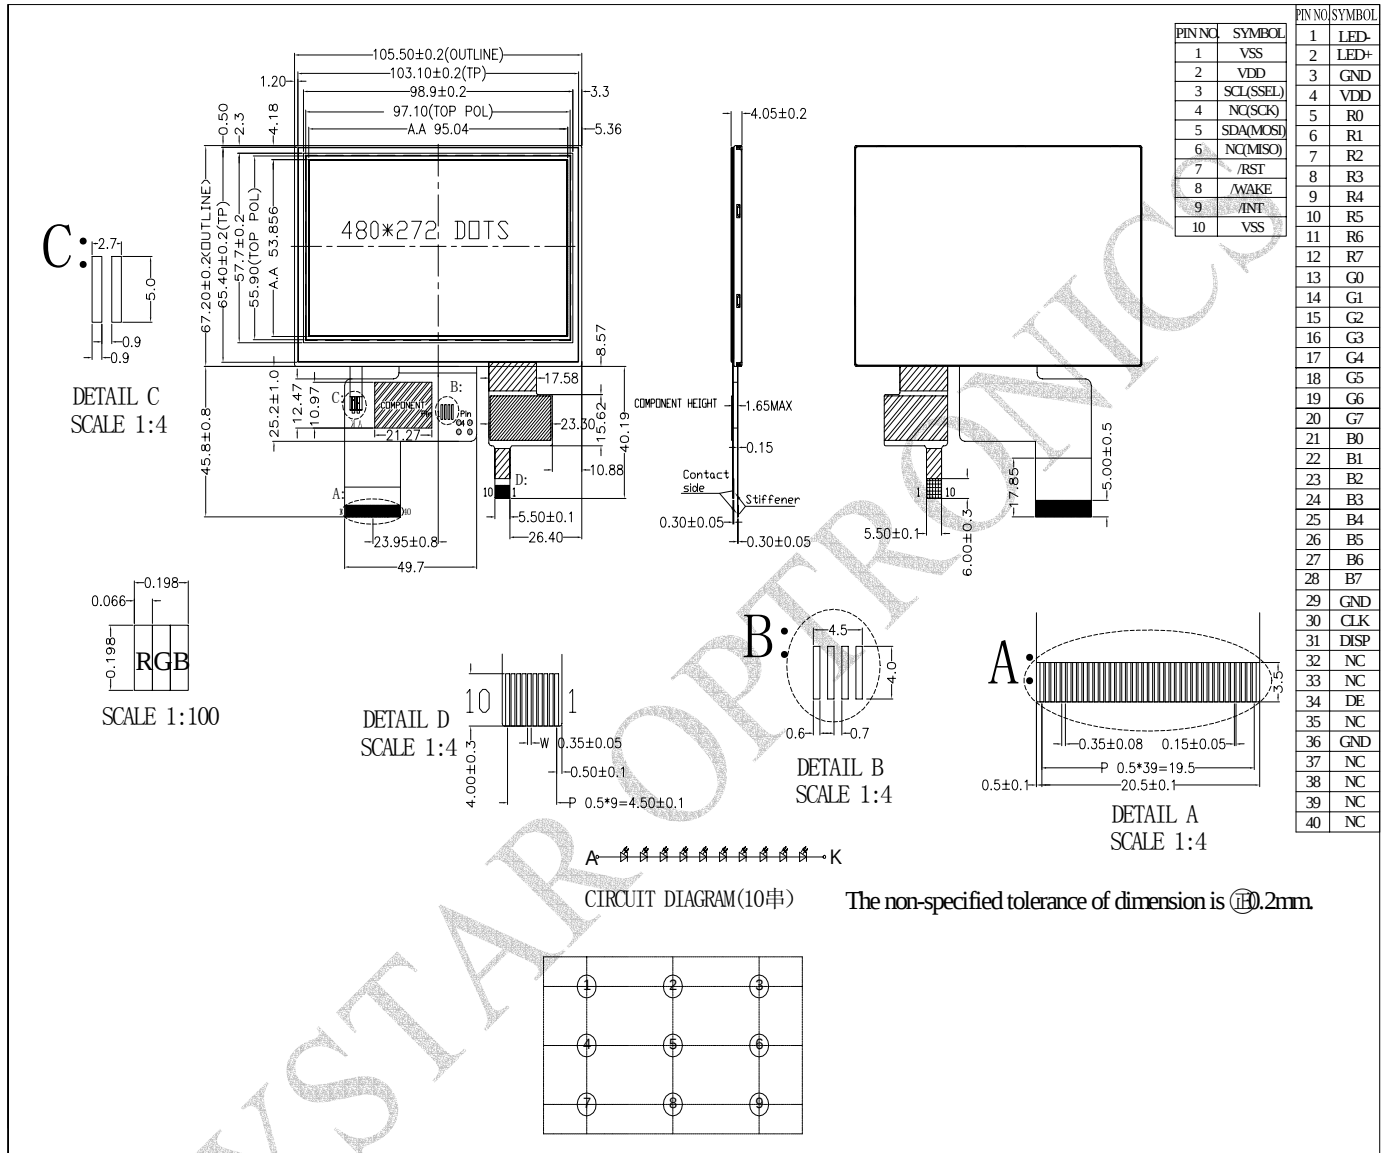

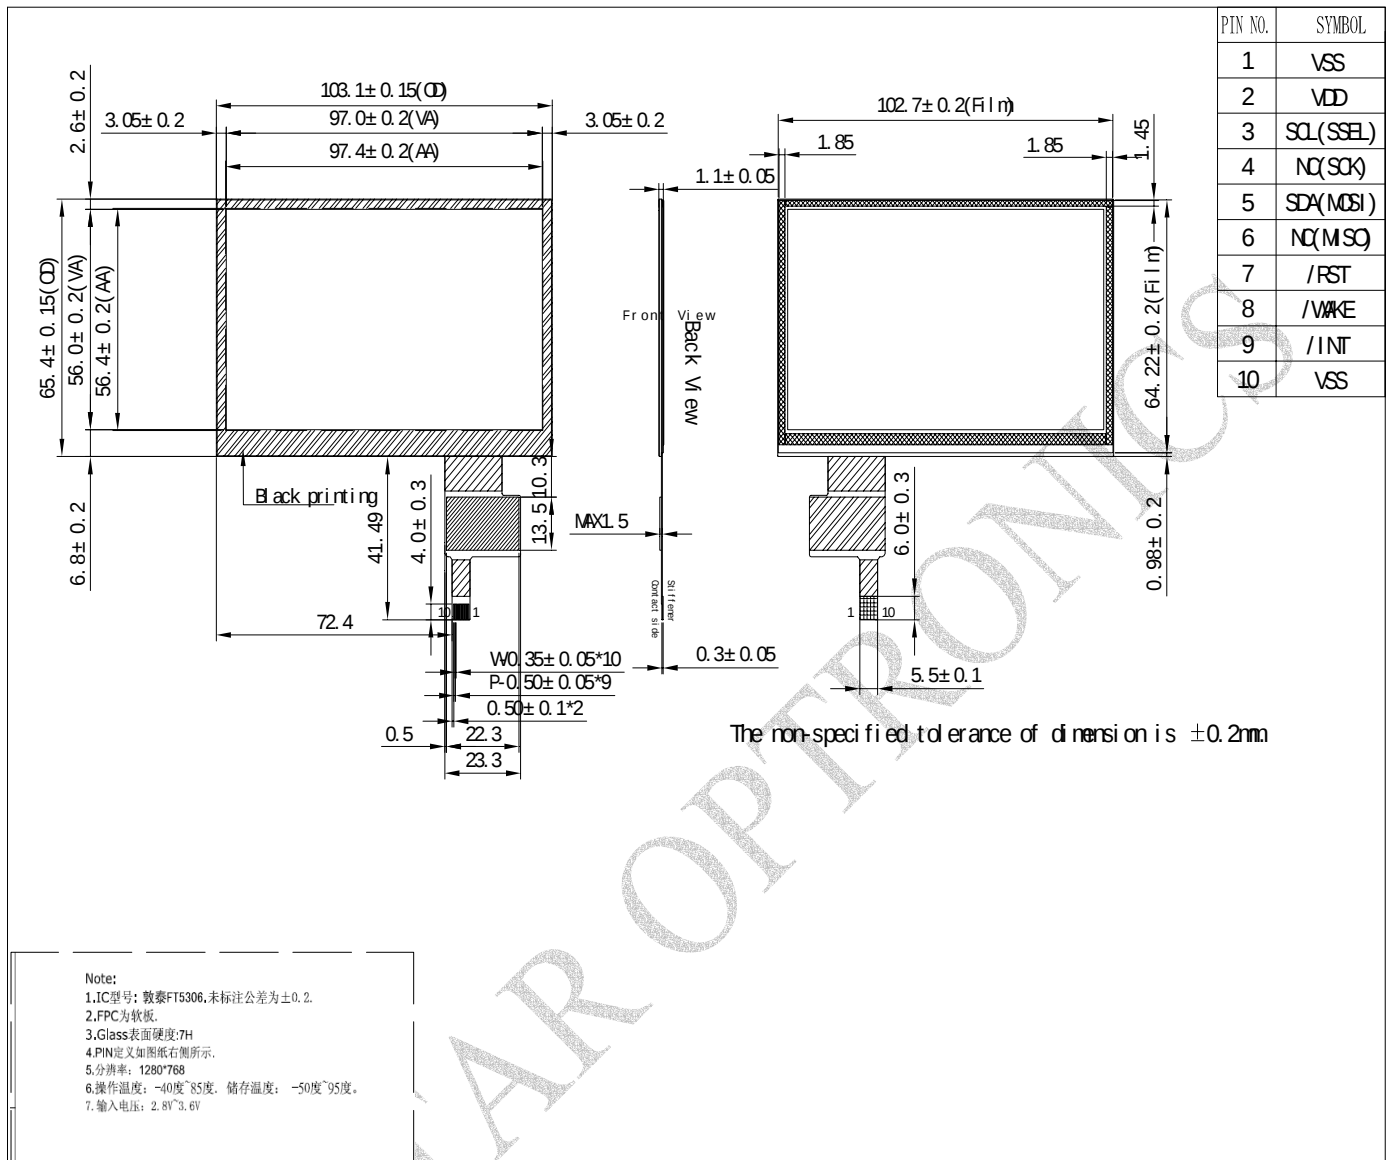

6. Block Diagram

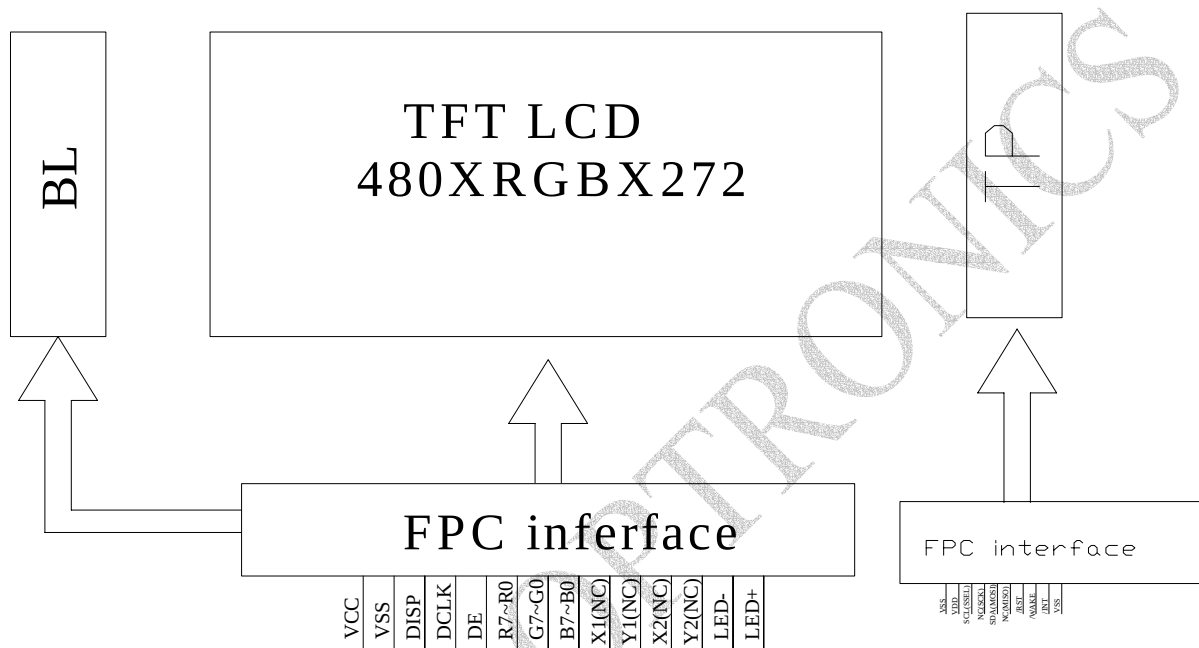


7. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	—	+70	°C
Storage Temperature	T_{ST}	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

- Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

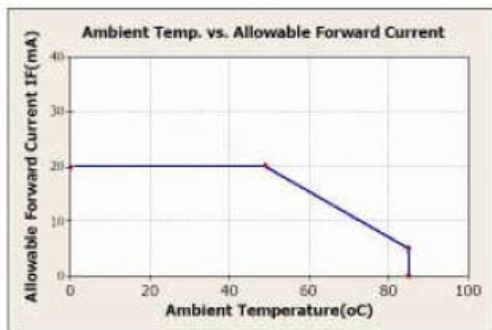

8. Electrical Characteristics


8.1. Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	VCC	—	3.1	3.3	3.5	V
Digital operation current	Icc	-	—	17	25	mA

8.2 LED driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED current		-	20	-	mA	
Power Consumption			640	680	mW	
LED voltage	VBL+	30	32	34	V	Note 1
LED Life Time		-	50,000	-	Hr	Note 2,3,4

Note 1 : There are 1 Groups LED



Note 2 : Ta = 25 °C

Note 3 : Brightness to be decreased to 50% of the initial value

Note 4 : The single LED lamp case

9. DC Characteristics


Parameter	Symbol	Rating			Unit	Condition
		Min.	Typ.	Max.		
Low level input voltage	V _{IL}	0	-	0.3 VCC	V	
High level input voltage	V _{IH}	0.7 VCC	-	VCC	V	


10. AC Characteristics

Parallel DE mode RGB input timing table

Signal	Symb ol	Min	Typ	Max	Unit
CLK frequency	Tcl	7	9	12	MHz
DEV period time	Tv	277	288	400	H
DEV display area	Tvd	272			H
DEV blanking	Tvb	5	16	128	H
DEH period time	Th	520	525	800	CLK
DEH display area	Thd	480			CLK
DEH blanking	Thb	40	45	320	CLK
CLK cycle time	Tclk	83	110	143	ns
Clock width of high level	Tcwh	40	50	60	%
Clock width of low level	Tcwl	40	50	60	%
Clock rising time	trck		-	9	ns
Clock falling time	tfck		-	9	ns
Data Setup Time	tdesu	10	-	-	ns
Data Hold Time	tdahd	10	-	-	ns
DE Setup Time	tdesu	10	-	-	ns
DE Hold Time	tdehd	10	-	-	ns

10.1 Timing Diagram

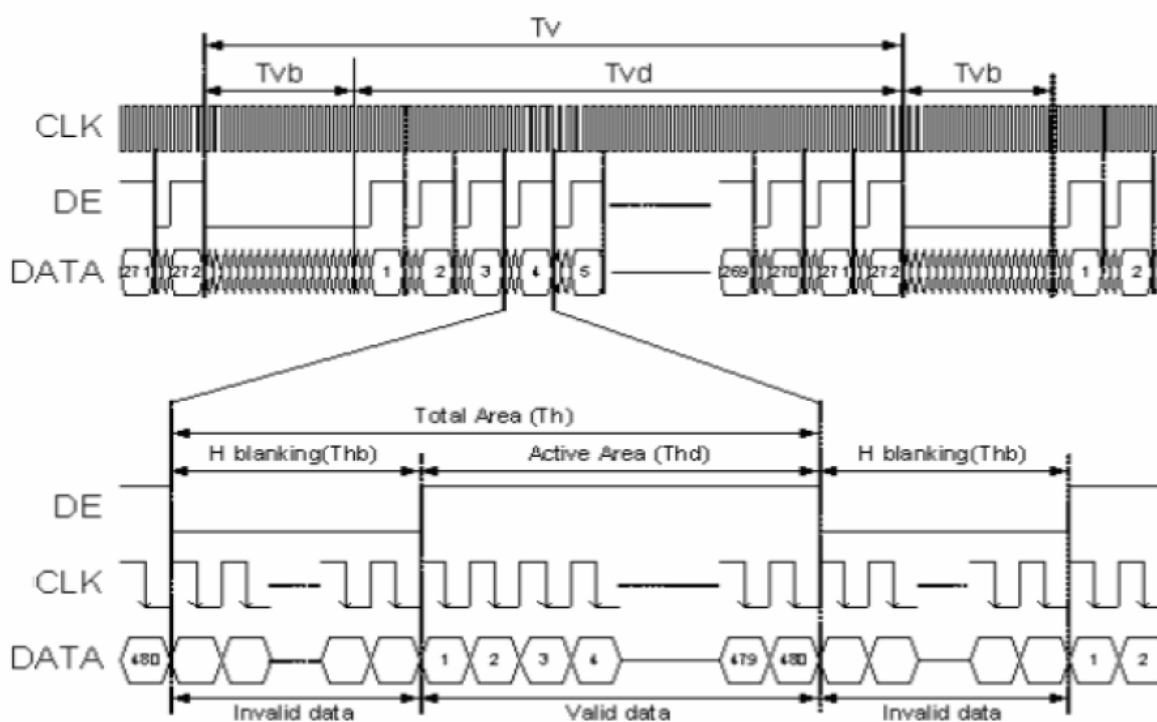

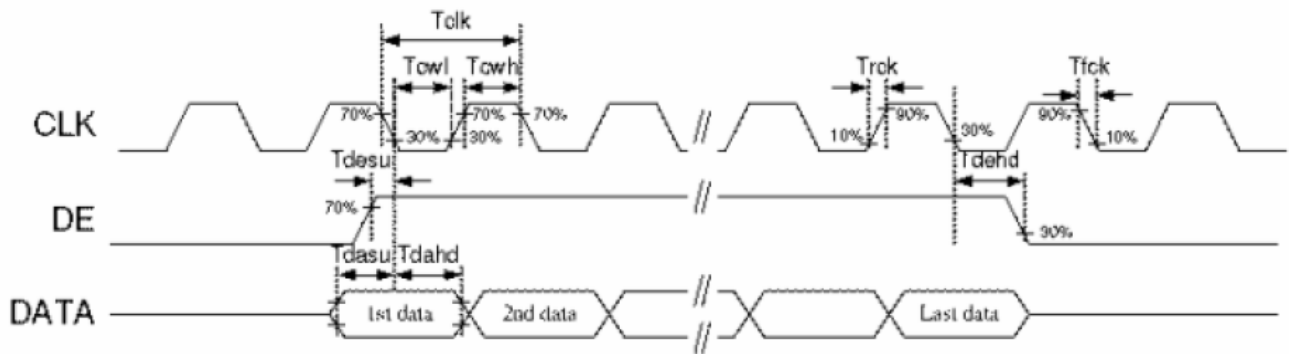

11. Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr	$\theta=0^{\circ}$ 、 $\Phi=0^{\circ}$	-	10	20	.ms	Note 3
		Tf		-	15	30	.ms	
Contrast ratio		CR	At optimized viewing angle	400	500	-	-	Note 4
Color Chromaticity	White	Wx	$\theta=0^{\circ}$ 、 $\Phi=0$	0.24	0.29	0.34		Note 2,5
		Wy		0.26	0.31	0.36		
Viewing angle	Hor.	ΘR	$CR \geq 10$	60	70		Deg.	Note 1
		ΘL		60	70			
	Ver.	ΦT		40	50			
		ΦB		60	70			
Brightness		-	-	288	-	480	cd/m ²	Center of display

Ta=25±2℃, IL=20mA

Note 1: Definition of viewing angle range

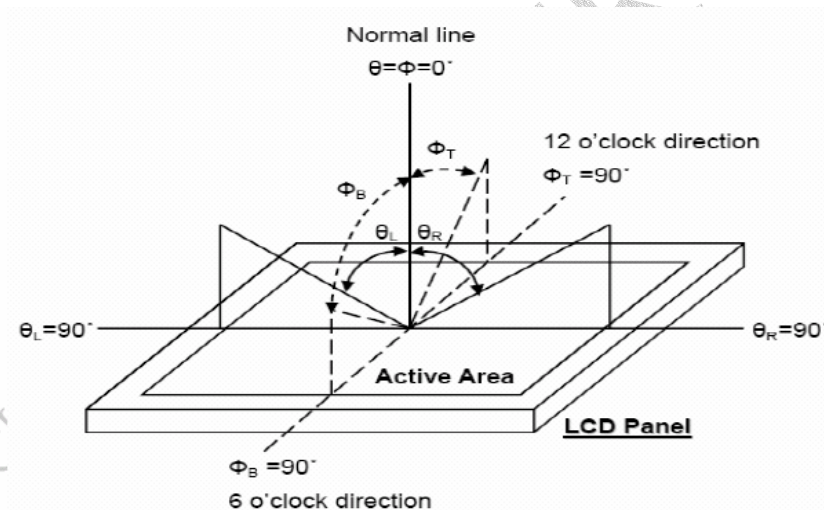


Fig. 11-1 Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 luminance meter 1.0° field of view at a distance of 50cm and normal direction.

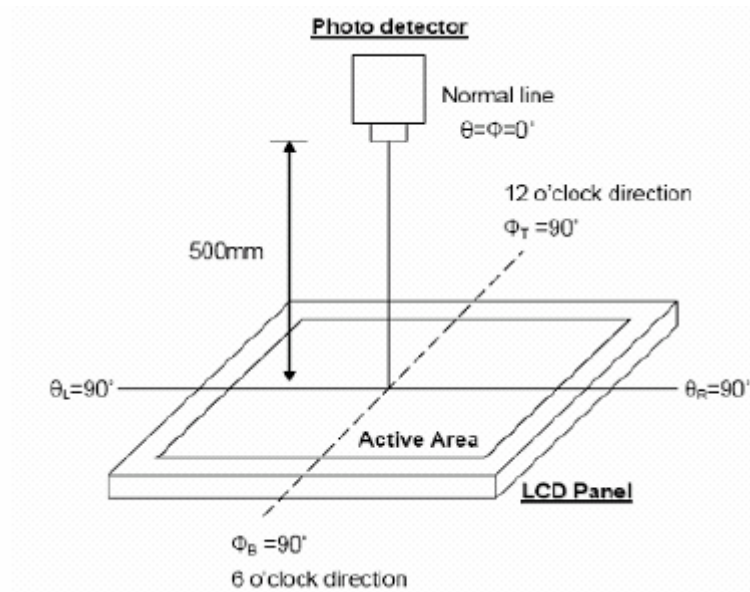


Fig. 11-2 Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%.

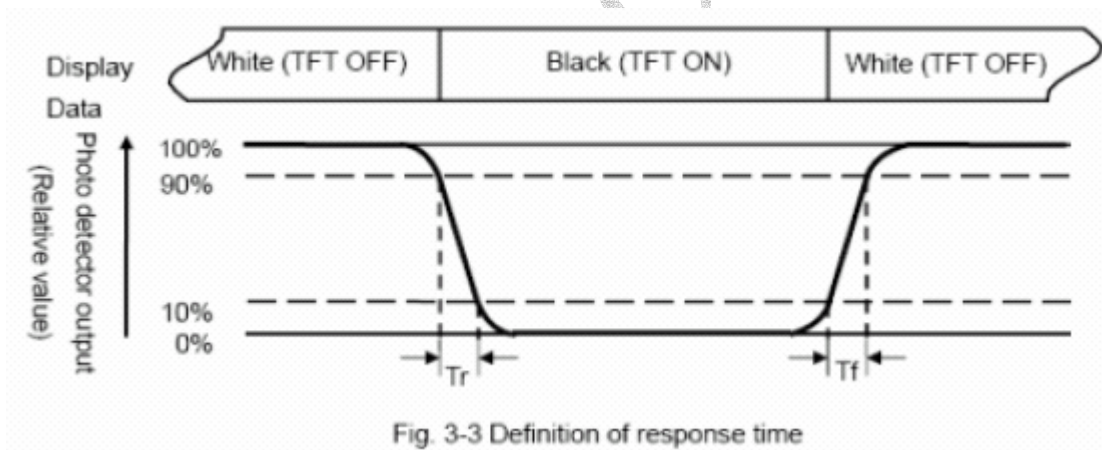


Fig. 3-3 Definition of response time

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$


Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel.

12. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

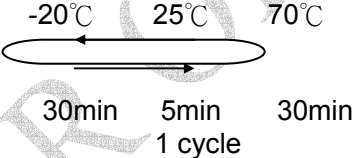Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°C, 90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C, 90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation 	-20°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed 3 amplitude : 15mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V, RS=1.5kΩ CS=100pF 1 time	—


Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

13. Package specification

<table border="1"> <tr> <td>LCM Model</td> <td>RFE430G-AIW-DNC</td> </tr> <tr> <td>Drawing NO.</td> <td></td> </tr> </table>		LCM Model	RFE430G-AIW-DNC	Drawing NO.		LCM 包裝規格書 LCM Packaging Specifications		<table border="1"> <tr> <td>Approve</td> <td>Check</td> <td>Contact</td> </tr> <tr> <td>DATE</td> <td>初版</td> <td>版次 Ver</td> </tr> <tr> <td>2013/04/11</td> <td>2013/04/11</td> <td>0</td> </tr> </table>			Approve	Check	Contact	DATE	初版	版次 Ver	2013/04/11	2013/04/11	0
LCM Model	RFE430G-AIW-DNC																		
Drawing NO.																			
Approve	Check	Contact																	
DATE	初版	版次 Ver																	
2013/04/11	2013/04/11	0																	
1.包裝材料規格表 (Packaging Material) :(per carton)																			
NO.	Item	Model	Dimensions	Quantity															
1	成品 (LCM)	RFE430G-AIW-DNC	105.5 x 67.2 x 2.95	396															
2	TRAY 盤 (2)	PKCA1XXXXXXXXXXXX0233	315 x 265 x 13.5	66															
3	BP01 內盒(3)Product Box	PK3R1XXXXXXXXXXXX0001	332 x 280 x 100	6															
4	泡棉(4)Foam	-----	283 x 230 x 8	6															
5	外紙箱(5)Carton	PK4Q1XXXXXXXXXXXX0000	565 x 340 x 320	1															
6																			
7																			
8																			
9																			
2.單箱數量規格表(Packaging Specifications and Quantity) : (1)LCM quantity per box : no per tray 6 x no of tray 11 = 66 (2)Total LCM quantity in carton : quantity per box 66 x no of boxes 6 = 396																			
特 記 事 項 (REMARK)																			
1. Label Specifications : MOOEL: LOT NO : QUANTITY: CHECK:		2.Rotate tray 180 degrees and place on top of stack. (TRAY 盤相疊時,需旋轉 180 度)																	

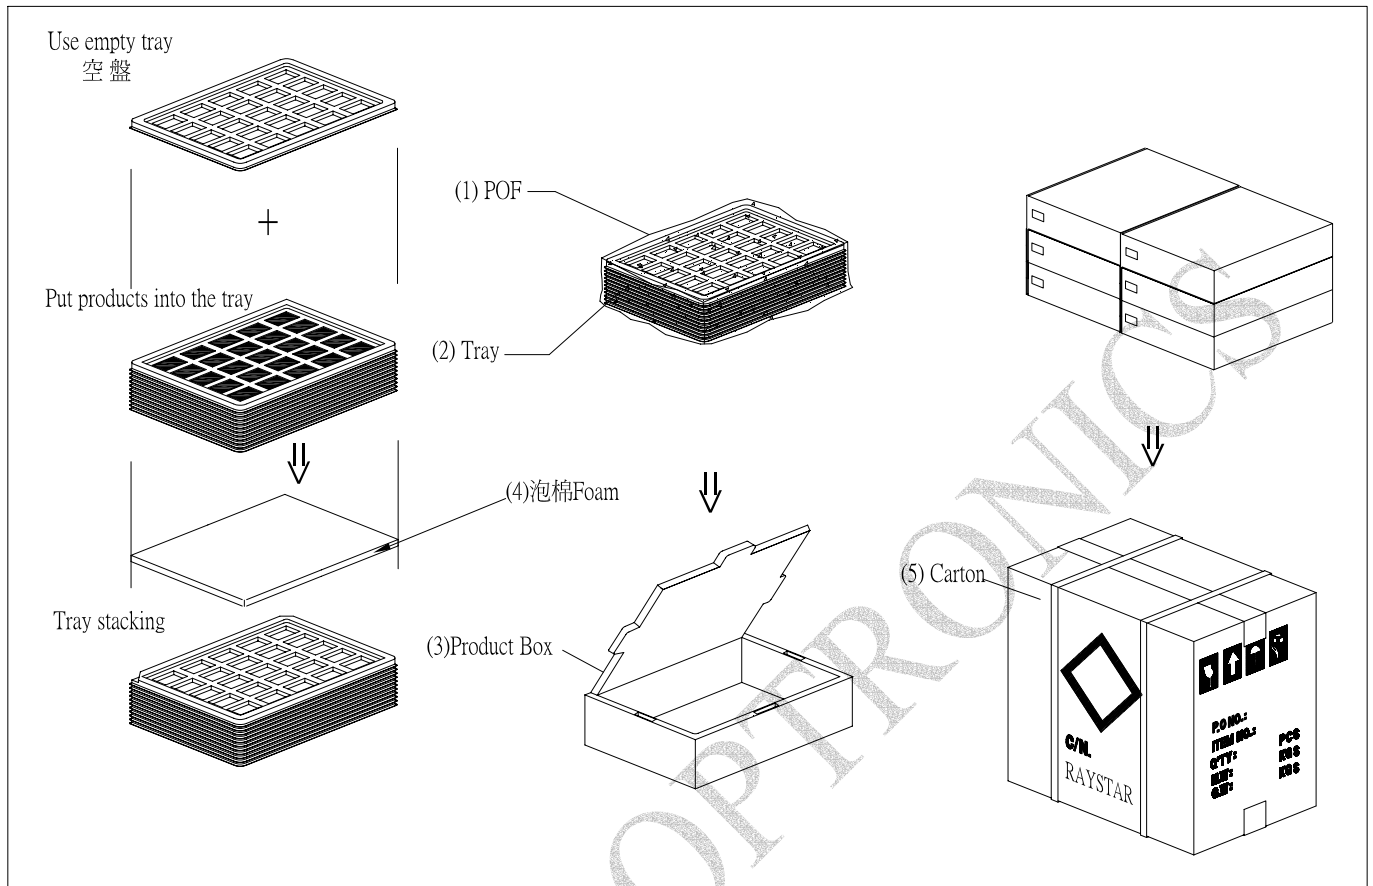

LCM Sample Estimate Feedback Sheet

Module Number : _____

1 、 Panel Specification :

1. Panel Type :	☐ Pass	☐ NG , _____
2. View Direction :	☐ Pass	☐ NG , _____
3. Numbers of Dots :	☐ Pass	☐ NG , _____
4. View Area :	☐ Pass	☐ NG , _____
5. Active Area :	☐ Pass	☐ NG , _____
6. Operating Temperature :	☐ Pass	☐ NG , _____
7. Storage Temperature :	☐ Pass	☐ NG , _____
8. Others : _____		

2 、 Mechanical Specification :

1. PCB Size :	☐ Pass	☐ NG , _____
2. Frame Size :	☐ Pass	☐ NG , _____
3. Material of Frame :	☐ Pass	☐ NG , _____
4. Connector Position :	☐ Pass	☐ NG , _____
5. Fix Hole Position :	☐ Pass	☐ NG , _____
6. Backlight Position :	☐ Pass	☐ NG , _____
7. Thickness of PCB :	☐ Pass	☐ NG , _____
8. Height of Frame to PCB :	☐ Pass	☐ NG , _____
9. Height of Module :	☐ Pass	☐ NG , _____
10. Others :	☐ Pass	☐ NG , _____

3 、 Relative Hole Size :

1. Pitch of Connector :	☐ Pass	☐ NG , _____
2. Hole size of Connector :	☐ Pass	☐ NG , _____
3. Mounting Hole size :	☐ Pass	☐ NG , _____
4. Mounting Hole Type :	☐ Pass	☐ NG , _____
5. Others :	☐ Pass	☐ NG , _____

4 、 Backlight Specification :

1. B/L Type :	☐ Pass	☐ NG , _____
2. B/L Color :	☐ Pass	☐ NG , _____
3. B/L Driving Voltage (Reference for LED Type) : ☐ Pass ☐ NG , _____		
4. B/L Driving Current :	☐ Pass	☐ NG , _____
5. Brightness of B/L :	☐ Pass	☐ NG , _____
6. B/L Solder Method :	☐ Pass	☐ NG , _____
7. Others :	☐ Pass	☐ NG , _____

>> Go to page 2 <<

Module Number : _____

5 、 Electronic Characteristics of Module :

1.Input Voltage :	☐ Pass	☐ NG , _____
2.Supply Current :	☐ Pass	☐ NG , _____
3.Driving Voltage for LCD :	☐ Pass	☐ NG , _____
4.Contrast for LCD :	☐ Pass	☐ NG , _____
5.B/L Driving Method :	☐ Pass	☐ NG , _____
6.Negative Voltage Output :	☐ Pass	☐ NG , _____
7.Interface Function :	☐ Pass	☐ NG , _____
8.LCD Uniformity :	☐ Pass	☐ NG , _____
9.ESD test :	☐ Pass	☐ NG , _____
10.Others :	☐ Pass	☐ NG , _____

6 、 Summary :
Sales signature : _____

Customer Signature : _____

Date : / /