

1

2


3

4

5


6

REV	REVISION RECORD	APPROVED
	First Issue	
	Modify thickness	
	Modify PCB	

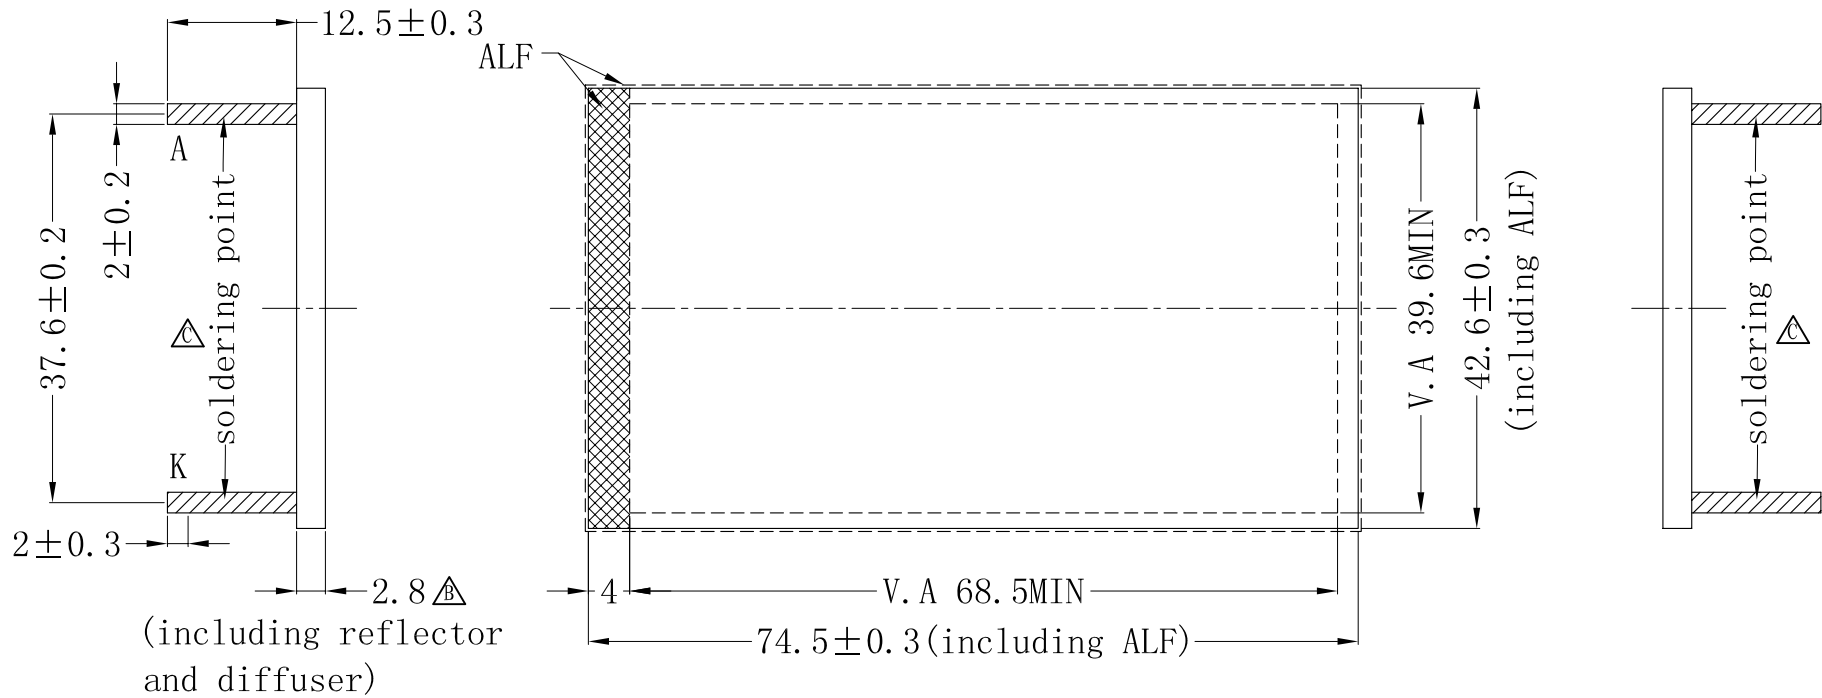

NOTES:

- Forward current: $V_F = 3.3V$
 $I_F = 15 \times 5 = 75mA$ (type)
- LED emission color: White
- Peak emission wavelength: $\lambda = 0.28 \pm 0.03$
 $\gamma = 0.28 \pm 0.03$
- Brightness: $200cd/m^2$ (typ.)
- Operation temperature: $-30^\circ C \sim +70^\circ C$
- Storage temperature: $-40^\circ C \sim +80^\circ C$
- Lead free process
- LED circuit:



General Tolerance ±				
mm	1	2	3	4
0~5	0.05	0.1	0.1	0.2
5~10	0.05	0.1	0.1	0.2
10~50	0.05	0.1	0.2	0.3
50~100	0.1	0.2	0.3	0.5
100~150	0.1	0.2	0.5	0.8
150~200	0.1	0.2	0.5	0.8



VERSION	DATE	MODEL NAME:
C	2011. 07. 14	
SCALE	NO.	UNIT
1/1		mm
APPROVED	CHECKED	DRAWN
FILE NAME:		