
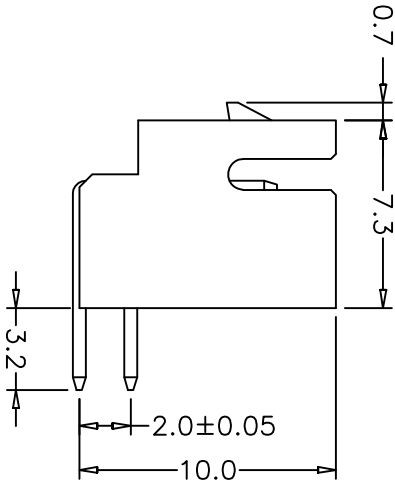
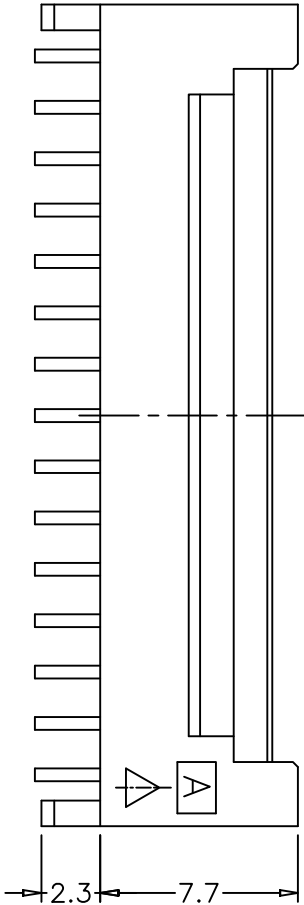


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2010/04/20	/	NEW	Vicky

SPECIFICATIONS


1. Voltage rating: 250V DC/AC
2. Current rating: 3.0A
3. Withstand voltage: 1000V AC
4. Working Temperature: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
5. Insulation resistance: $\geq 1000\text{M}\Omega$
6. Contact resistance: $\leq 30\text{m}\Omega$
7. Wafer: Nylon46 UL94V-0
8. Pin: Brass Tin-plated

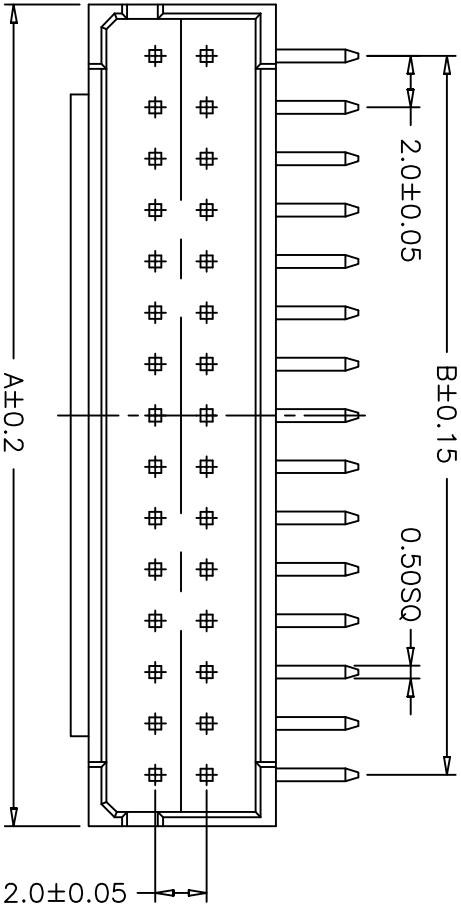

PIN NO.	A	B	PIN NO.	A	B
2x4	10.0	6.0	2x18	38.0	34.0
2x5	12.0	8.0	2x19	40.0	36.0
2x6	14.0	10.0	2x20	42.0	38.0
2x7	16.0	12.0	2x21	44.0	40.0
2x8	18.0	14.0	2x22	46.0	42.0
2x9	20.0	16.0	2x23	48.0	44.0
2x10	22.0	18.0	2x24	50.0	46.0
2x11	24.0	20.0	2x25	52.0	48.0
2x12	26.0	22.0	2x26	54.0	50.0
2x13	28.0	24.0	2x27	56.0	52.0
2x14	30.0	26.0	2x28	58.0	54.0
2x15	32.0	28.0	2x29	60.0	56.0
2x16	34.0	30.0	2x30	62.0	58.0
2x17	36.0	32.0			

GENERAL TOLERANCE			UNITS mm		NAME:	WF	TITLE: Wafer:2.0mm 2*XP DIP 90° PHSD
SELECT	✓						
TOL	1	2	3		PART NO:	WF200**-08***	
X.XXX		±0.05	±0.15		MAT'L		
X.XX		±0.08	±0.13	±0.25	FINISH		
X.X		±0.15	±0.25	±0.50	APPD:	MKE	
X.		±0.20	±0.35	±1.00	CHKD:	Vicky	
ANGLE	±2°				DR:	Iris	

P.C.B LAYOUT

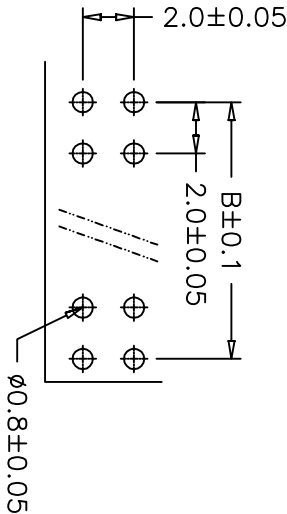

ø0.8±0.05