

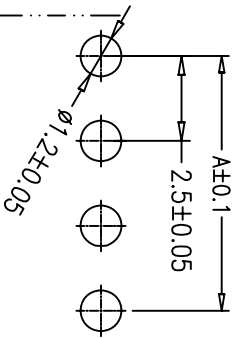


REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2013/12/14	/	NEW	Vicky

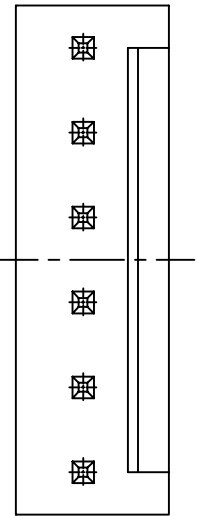

P.C.B LAYOUT

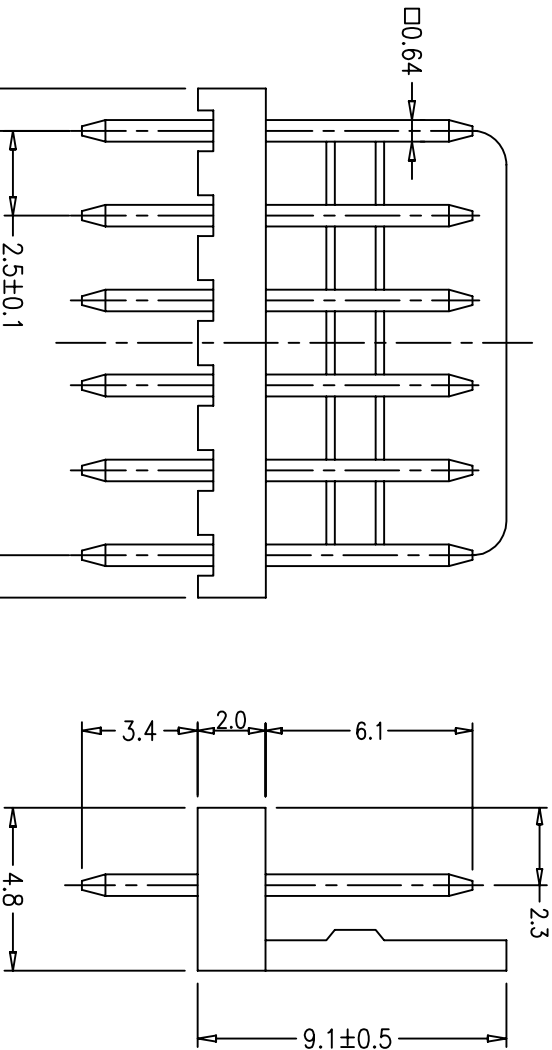

SPECIFICATIONS

Applicable Wire: AWG.#28~#22

Rated voltage: 250V DC/AC(rms)

Rated Current: 2.5A (AWG.#22)

Withstand voltage: 800V AC/min.

Working Temp : -25°C ~ +85°C

Insulation resistance: ≥1000 MΩ

Contact resistance: ≤20 mΩ


MATERIAL

Insulator: PA66, UL94-V2

Contact PIN: Brass

PIN NO.	A	B
2	2.5	5.0
3	5.0	7.5
4	7.5	10.0
5	10.0	12.5
6	12.5	15.0
7	15.0	17.5
8	17.5	20.0
9	20.0	22.5
10	22.5	25.0
11	25.0	27.5
12	27.5	30.0
13	30.0	32.5
14	32.5	35.0
15	35.0	37.5

GENERAL TOLERANCE				UNITS mm		NAME: WF		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.		
SELECT	✓			MAT'L		PART NO:		TITLE: Wafer2.5mm XP DIP 180° 白色 靠背式 250		
TOL	1	2	3			WF250***-12***				
X.XXX		±0.05	±0.15	FINISH		APPD:		DWG NO.		
X.XX	±0.15	±0.13	±0.25			Vicky		ATOM-A01518		
X.X	±0.25	±0.25	±0.50			CHKD:				
X.	±0.30	±0.38	±1.00	Q'TY		Doris				
ANGLE	±2°					DR:		1:1		
						Iris				
								SCALE		
								SHEET		
								REV		
								A		



SCALE	SHEET	REV
1:1	1/1	A