



REV.	DATE	ECN.NO	MODIFY.CONTENT

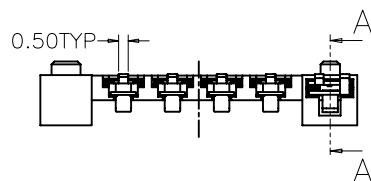

SEC A-A

Notes:



Material:Phosphor Brozne (C5210R)
SIMM Card connector,Type 1,8Pin

Physical:



Housing:LCP UL 94V-0
Contact:Selective Gold Flash

Specifications:


Voltage Current rating:1A. 50V AC
Insulation Resistance:100Mohm MIN
Contact Withstanding Voltage:AC 500V For 1Minute
Temperteure Rating:-40° To +85°

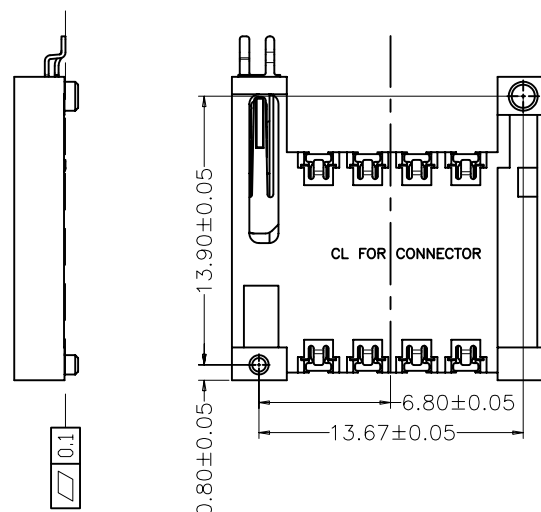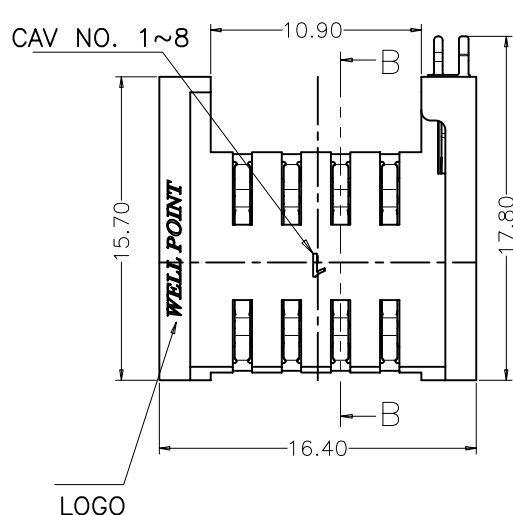

SEC B-B

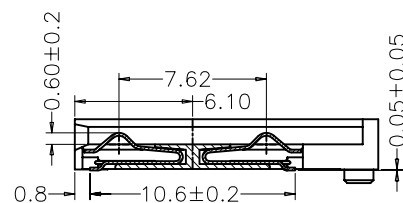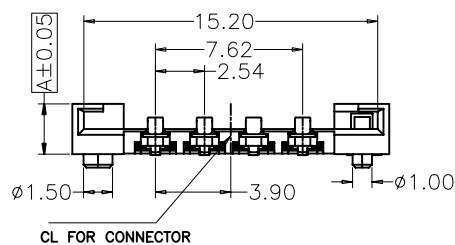


产品高度A	产品料号
A=2.6mm	SI48C-08200
A=3.1mm	SI51C-08200

GENERAL TOLERANCE				UNITS mm		NAME(INTENDED USE)		ATOM [®] 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO.,LTD.					
SELECT	✓			MAT'L		SIM CARD 8PIN CONNECTOR							
TOL. ON.	1	2	3	FINISH		PART NO.(INTENDED USE)		TITLE: ASS'Y DRAWING FOR SIM CARD 8PIN CONNECTOR					
X.XXX	±0.05	±0.05	±0.15			SI48C-08200(H=2.6mm) SI51C-08200(H=3.1mm)							
X.XX	±0.08	±0.13	±0.25	Q'TY		APPD:		DWG NO.: ATOM-A02943					
X.X	±0.15	±0.25	±0.50			CHKD:							
X.	±0.20	±0.38	±1.00	ANGLE		DR: David							
	±2°												
								SCALE		SHEET		REV.	
								1:1		1/2		A1	


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV.	DATE	ECN.NO	MODIFY.CONTENT

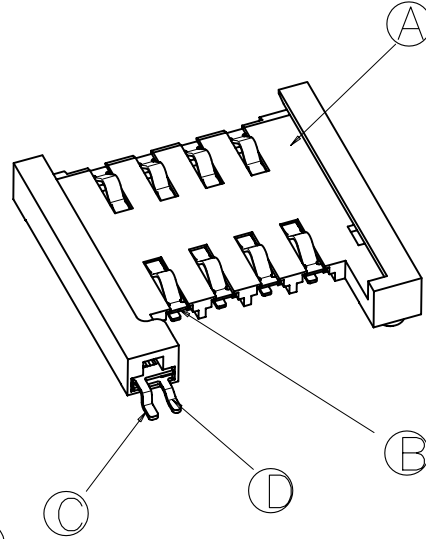


SIM CARD CONTACT LOCATION (GSM11.11)


UPPER EDGE

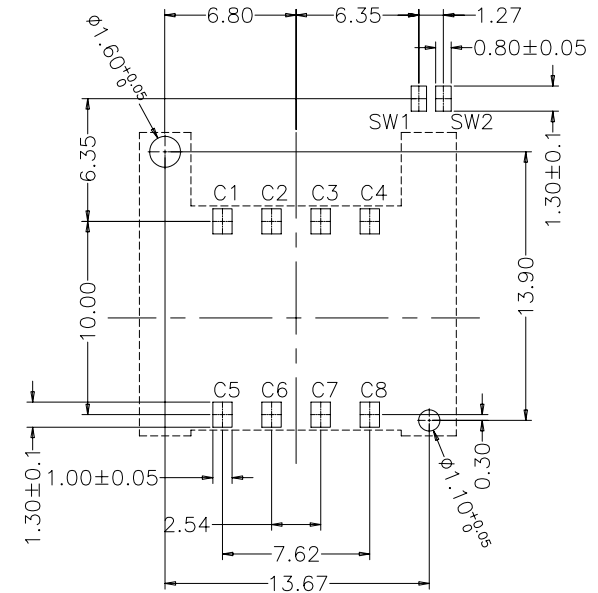

REFERENCE PCB LAYOUT

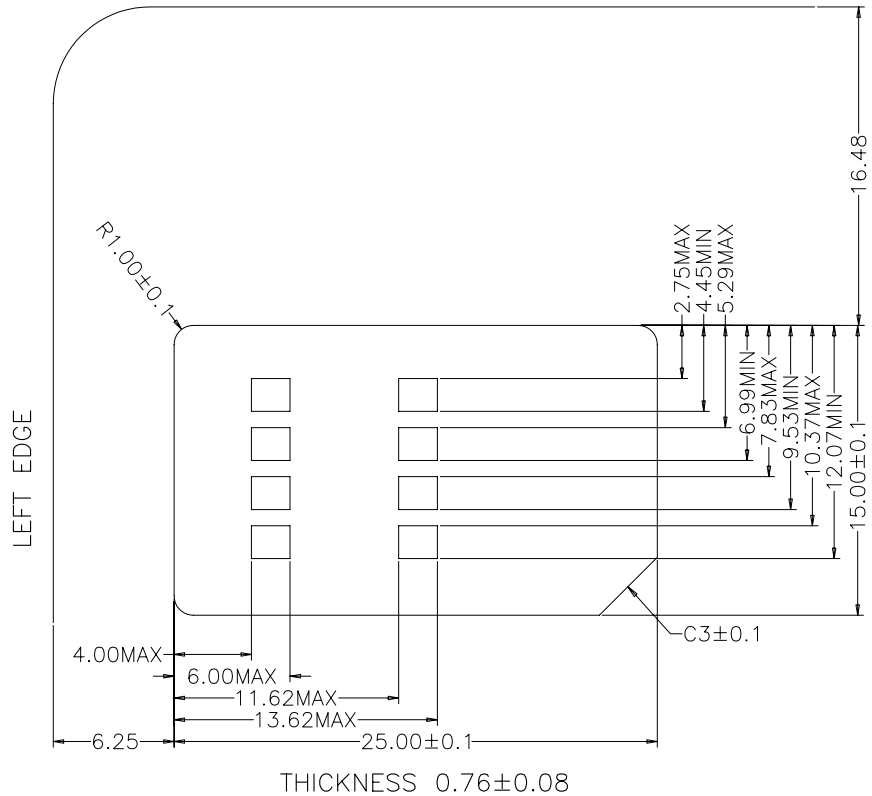

①	CD TERMINAL B	C5210R	1 PCS	
②	CD TERMINAL A	C5210R	1 PCS	
③	TREMINAL	C5210R	8 PIN	
④	HOUSING	LCP	1 PCS	
ITEM	PART NAME	MATERIAL	Q'TY	REMARK

GENERAL TOLERANCE				UNITS	NAME(INTENDED USE)		ATOM® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.					
SELECT	✓			mm	SIM CARD 8PIN CONNECTOR							
TOL ON.	1	2	3	FINISH	PART NO.(INTENDED USE)		TITLE:					
X.XXX	±0.05	±0.05	±0.15		SI48C-08200(H=2.6mm)		ASS'Y DRAWING FOR					
X.XX	±0.08	±0.13	±0.25		SI51C-08200(H=3.1mm)		SIM CARD 8PIN CONNECTOR					
X.X	±0.15	±0.25	±0.50	Q'TY	APPD:		DWG NO.:					
X.	±0.20	±0.38	±1.00		CHKD:		ATOM-A02943					
ANGLE	±2°				DR: David							
							SCALE		SHEET		REV.	
							1:1		2/2		A1	